

The world of MAJA Ice Machines


FLAKE ICE

NUGGET ICE



MAJA[®]

A deep-frozen metal cylinder, rotating in a water reservoir, guarantees constant ice quality. With each rotation, water freezes on the evaporation drum and then flakes off, leaving the machine as dry-frozen ice. This system of ice production was developed by MAJA and has proven its reliability for more than five decades. It is efficient, cost-saving and does not require special maintenance.

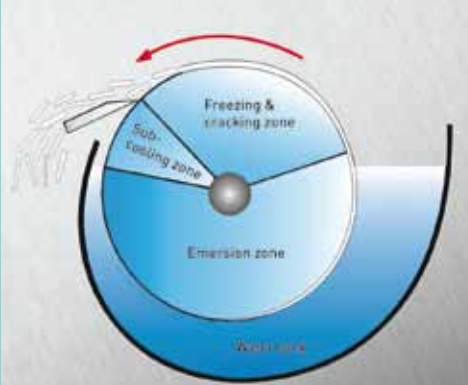

Flake Ice Technology by MAJA:

Simple, but ingenious - for over 60 years!



MAJA Flake Ice for versatile use:

Applications

- Mincer process for boiled sausage production
- Dough production for baking and pastry products
- Refrigeration of fish and seafood
- Filling of fresh food displays in supermarkets
- Decorative refrigeration of buffets (in hotels, restaurants, event catering...)
- Cryotherapy in human and veterinary medicine
- Health spas & leisure swimming baths
- Artificial snow tracks for sports and leisure

Efficient refrigeration - ice temperature approx. -7°C

- Quick product cooling
- Long freshness

Dry-frozen flake ice

- Dry surface, virtually no water from melting
- Easy storage, easy handling
- Attractive appearance

Light weight (density 0,42 kg / dm³)

- Up to 30% lighter than other types of ice, thus less ice requirements for display filling and reduced costs for transportation.

Thin ice flakes (1-2 mm)

- Very good product covering
- Big surface, thus good heat exchange
- Little mechanical resistance, thus good mixing behaviour, no damage to the product and to the tools, such as mincer blades, dough hooks...

Reduced production costs

- High efficiency
- 100% of the water becomes ice, therefore no waste of water

High reliability - low maintenance

- Reduced operating and maintenance costs
- No additional efforts for water treatment, such as softening, filtration...



HY-GEN Flake Ice Machines from MAJA are designed to allow the production of flake ice under excellent sanitary conditions. The core piece is the water tank in plastic material, which can easily be removed for cleaning.

The HY-GEN sanitation principle by MAJA: Ideal conditions for efficient cleaning, by hand and also fully automatically!

The MAJA Label „HY-GEN Protected“ stands for:

- Evaporator can be opened without the use of tools for cleaning purposes and is accessible from all sides.
- Easily removable hygiene water tank in plastic material (insulation and no corrosion).
- Round-shaped, cleaning-friendly water tank; if necessary it is even replaceable.
- Water tank free of built-in parts without angles, edges and screws, for easy and efficient cleaning.
- Automatic water pipe rinsing when the machine was out of operation for more than 24 hours.
- Special hygiene advantages in conformity with the current German drinking water regulations issued by the DVGW (German association for water & gas), for example: water supply with back-flow protection, special drinking water hoses for protection from biofilm.



Option MAJA-SCS:

MAJA Flake Ice Machines can also be cleaned fully automatically. Thanks to the patented evaporator self-cleaning system MAJA-SCS, the ice producing unit can be regularly cleaned without investing additional working time or labour.

The cleaning cycle is started manually by ON/OFF push-buttons or fully automatically by programmable control panel (option). A mixture of water and special cleaning agent flows around all machine parts that contact water, thus cleaning, deliming and reduction of germs in one and the same operation.

MAJA-SCS is not only a guarantee for ideal sanitation conditions for the production of flake ice: The efficient routine cleaning process helps to maintain the value of your MAJA Flake Ice Machine.



Water tank removal at the side for the small machine types up to 500 kg



Water tank removal at the top for all machine types from 800 kg upwards.

Compact and space saving:
The smallest MAJA Flake Ice
Machines **SAH 85 L / SAH 170 L**
with integrated condensing unit
and mobile ice storage system
EV 50.
Ice output 85 and 170 kg / 24 h.



Flake ice machines with integrated condensing unit and ice storage system

SAH



SAH 85 / SAH 170 L with EV 50



Removal of the water
tank for cleaning purposes

Equipment & features

Machine structure:

- Cleaning-friendly machine design according to the HY-GEN sanitation principle with removable water tank.
- Frame and housing in stainless steel.
- With mobile ice storage system **EV 50** for storage and transport of approximately 50 kg of flake ice:
 - Inner and outer surface in robust polypropylene.
 - Foamed PU insulation for ideal storage conditions.
 - Cleaning-friendly surfaces.
 - Drainage plate to separate melting water from the ice.
 - Easy emptying by water drain with outlet valve.
 - Wheeled base in stainless steel for easy mobility.
 - Solid and stackable thus space-saving.

Refrigeration:

- Condensing unit in air-cooled execution (L)
- Refrigerant R449A or R404A **)
- With integrated heat exchanger for optimum energy efficiency
- Refrigerant stop valve and refrigerant pump-down when the machine stops.

Operation:

- Easy operation by ON/OFF pushbuttons (see page 16):
With function and error code indication, start/stop function of optional self-cleaning system.
- Reliable SPS control unit.



Stackable ice storage bins
EV 50 on wheeled base

85 / 170 L



Options

- **Patented fully automatic self-cleaning system:**
MAJA-SCS for time savings and optimum sanitation safety by automating the cleaning process; standard for SAH 170 L, optional equipment for SAH 85 L
- **Additional ice storage systems EV 50:**
For more flexibility by alternating use and increased storage capacity.
- **Cover for EV 50:**
For hygienic transportation and storage.
- **Control Panel ON/OFF for remote operation:**
With wall holdfast and cable 5 m (see page 16)
- **Control Panel Timer with timer function** (see page 16):
Freely programmable ice production and cleaning cycles
- **External UV-disinfection system** in the water supply
- **External water pre-heater:**
For water / ambient temperatures between +2°C and +5°C



Technical details

Type	Ice output *) kg / 24 h (1 h)	Water consumption (fresh water) m³/24 h	Electrical connection 1AC/50Hz/230V/PE kW	Width mm	Depth mm	Height mm	Ice storage kg	Refrigerant charge kg	GWP **)	CO2e t	Weight approx. kg
SAH 85 L R449A	85 (3,5)	0,085	0,58	705	700	1380	approx. 50	0,7	1397 (R449A)	1,0	155
SAH 85 L R404A	85 (3,5)	0,085	0,58	705	700	1380	approx. 50	0,7	3922 (R404A)	2,7	155
SAH 170 L R449A	170 (7,0)	0,170	0,99	705	700	1380	approx. 50	1,0	1397 (R449A)	1,4	175
SAH 170 L R404A	170 (7,0)	0,170	0,99	705	700	1380	approx. 50	1,0	3922 (R404A)	3,9	175

*) The indicated ice output is an approximate value (depending on installation conditions).

Water temperature +16°C, ambient temperatures +20°C; higher temperatures may lead to reduced ice output.

**) R449 A and R404A belong to the fluorinated greenhouse gases.

Connections:

Water supply 3/4" external thread, drain water 2 x 3/4" hose clip

MAJA®

MAJA Flake Ice Machines
SAH 250 L and SAH 500 L:
 Compact machine structure,
 including condensing unit.
 Ice output 250 and 500 kg / 24 h



SAH 250 / 500

Flake ice machines with integrated condensing unit

SAH

Equipment & features

Machine structure:

- Cleaning-friendly machine design according to the principle of HY-GEN sanitation with removable water tank.
- Frame and housing in stainless steel.

Refrigeration:

- Condensing unit in air-cooled execution (L); water-cooled execution (W) on demand.
- Refrigerant R449A or R404A **]
- With integrated heat exchanger for optimum energy efficiency.
- Refrigerant stop valve and refrigerant pump-down when the machine stops.

Operation:

- By ON/OFF pushbuttons. Control panels with or without program function (see page 16).
- Reliable SPS control unit.



Examples of installation SAH 250/500:
 On subframe for ice cart EVA 75 or on silo EN1

Technical details

Type	Ice output *) kg / 24 h (1 h)	Water consumption (fresh water) m³/24 h	Electrical connection 1AC/50Hz/230V/PE kW	Width mm	Depth mm	Height mm	Refrigerant charge kg	GWP **)	CO2e t	Weight kg
SAH 250 L R449A	250 (10)	0,25	1,26	776	581	996	1,6	1397 (R449A)	2,2	145
SAH 250 L R404A	250 (10)	0,25	1,26	776	581	996	1,5	3922 (R404A)	5,9	145

Type	Ice output *) kg / 24 h (1 h)	Water consumption (fresh water) m³/24 h	Electrical connection 3AC/50Hz/400V/PE kW	Width mm	Depth mm	Height mm	Refrigerant charge kg	GWP **)	CO2e t	Weight kg
SAH 500 L R449A	500 (20)	0,50	2,05	776	581	996	2,1	1397 (R449A)	2,9	180
SAH 500 L R404A	500 (20)	0,50	2,25	776	581	996	2,0	3922 (R404A)	7,8	180

Special voltage on demand.

*) The indicated ice output is an approximate value (depending on installation conditions).

Water temperature +16°C, ambient temperatures +20°C; higher temperatures may lead to reduced ice output.

**) R449A / R404A belong to the fluorinated greenhouse gases.

Connections:

Water supply 3/4" external thread, drain water 3/4" hose clip

Installation with minimum wall distance at the left and rear side of the machine.

MAJA Flake Ice Machines
SAH 800 / 1500 / 3000:
 Compact machine structure,
 including condensing unit.
 Ice output 800 - 3000 kg / 24 h



SAH 800 - 3000

Flake ice machines with integrated condensing unit

SAH

Equipment & features

Machine structure:

- Cleaning-friendly machine design according to the principle of HY-GEN sanitation with removable water tank.
- Frame and housing in stainless steel.

Refrigeration:

- Different versions of condensing units are available:
 - standard air-cooled execution (L)
 - water-cooled execution (W) on demand
- Refrigerants R404A or R449A **)
- With integrated heat exchanger for optimum energy efficiency.
- Refrigerant stop valve and refrigerant pump-down when the machine stops.

Easy operation:

- By control panel ON/OFF for remote operation; see page 16 for a big variety of control panels with or without program function.
- Reliable SPS control unit.

Options

■ Condensing unit in water-cooled execution (W):

For a temperature difference IN-OUT of about 10 - 20 K.

■ Condensing unit cooling by heat exchange circuit (WS):

For a temperature difference of heat transfer medium or water IN-OUT of about 5 K ($t_{\min} - 8^{\circ}\text{C}$).

Technical details

Type	Ice output *) kg / 24 h (1 h)	Water consumption (fresh water) m ³ /24 h	Electrical connection 3AC/50Hz/400V/N/PE kW	Width mm	Depth mm	Height mm	Refrigerant charge kg	GWP **)	CO ₂ e t	Weight kg
SAH 800 L R449A	800 (33)	0,80	2,52	1170	760	1150	4,2	1397 (R449A)	4,9	280
SAH 800 L R404A	800 (33)	0,80	2,82	1170	760	1150	4,0	3922 (R404A)	12,9	280
SAH 1500 L R449A	1500 (62)	1,50	4,37	1430	780	1230	5,2	1397 (R449A)	7,3	355
SAH 1500 L R404A	1500 (62)	1,50	4,97	1430	780	1230	5,0	3922 (R404A)	19,6	355
SAH 3000 L R449A	3000 (125)	3,00	7,76	1700	980	1420	10,0	1397 (R449A)	14,0	600
SAH 3000 L R404A	3000 (125)	3,00	8,68	1700	980	1420	10,0	3922 (R404A)	39,2	600

Special voltage on demand.

*) The indicated ice output is an approximate value (depending on installation conditions).

Water temperature +16°C, ambient temperatures +20°C; higher temperatures may lead to reduced ice output.

**) R449A / R404A belong to the fluorinated greenhouse gases.

Connections:


Water supply 3/4" external thread, drain water 1" hose clip

Flake ice machines **RVH-L** and **RVH-LT**: split version for separate installation of ice producing unit (rotating evaporator) and condensing unit, designed to provide individual solutions.

Ice output 250 - 12000 kg / 24 h



RVH 1500 L

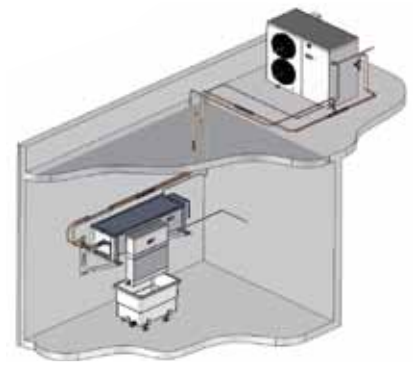

Flake ice machines with separate condensing unit

Equipment & features

Machine structure:

- Cleaning-friendly machine design according to the principle of HY-GEN sanitation with removable water tank.
- Separate condensing unit in weather protection housing in galvanized steel. Silent, solid and service-friendly solution with good access for maintenance.
- RVH 9000 and RVH 12000 L/LT consist of two separately operated rotating evaporator units.
Advantages: individual control of ice output according to varying needs and high operational safety.

Refrigeration:

- The ice producing unit is made for operation with the fluorinated greenhouse gases R449A (GWP 1397) or R404A (GWP 3922) and is supplied without refrigerant filling.
The refrigerant charge and the resulting CO2 equivalent (CO2e) of the ice machine must be determined during its start-up.
- Air-cooled condensing unit:
Temperature range version L: approx. -15°C until +38°C
Temperature range version LT: approx. -15°C until +42°C with R449A and +45°C with R404A).

- With heat exchanger for optimum energy efficiency.
- Electronic condenser fan speed regulator for automatic adaptation to variable ambient temperatures.

Easy operation:

- By control panel ON/OFF for remote operation; see page 16 for a big variety of control panels with or without program function.

Options

- **Winter mode:**
For ambient temperatures -15°C until -40°C.
- **Water-cooled execution of (separate) condensing unit:**
Version W for a temperature difference t_{IN} / t_{OUT} approx. 10 - 20 K.
- **Refrigeration of (separate) condensing unit by heat transfer medium or water:**
Version WS for a temperature difference t_{IN} / t_{OUT} of approx. 5 K (t_{min} -8°C)
- **Special coating of condenser fans:**
For installation in aggressive (salt-laden) sea air.

Examples of condensing units:



L1000



L1500 - L3000



LT2500 - LT3000



L6000 / LT6000

Flake ice machines with separate condensing unit R449A / R404A up to approx. +38°C

RVH-L

Technical details

Type	Ice output *) kg / 24 h (1 h)	Fresh water consumption m³/24h	Electrical connection RVH 3AC/50Hz/400V/N/PE kW	Width mm	Depth mm	Height mm	Weight approx. kg	Condensing unit "L" dimensions WxDxH mm Electrical connection kW R449A / R404A Weight approx. kg
RVH 250 L	250 (10)	0,25	on demand					
RVH 400 L	400 (16)	0,40	0,28	1185	512	525	85	1032x462x751 1,71 / 1,91 90
RVH 800 L	800 (33)	0,80	0,28	1345	512	525	125	1352x732x891 2,25 / 2,55 167
RVH 1000 L	1000 (41)	1,00	0,28	1545	512	525	145	1352x732x891 2,96 / 3,31 168
RVH 1500 L	1500 (62)	1,50	0,28	1695	512	525	160	1352x732x1201 4,09 / 4,69 262
RVH 2000 L	2000 (83)	2,00	0,28	1695	512	525	160	1700x946x1536 6,65 / 7,43 330
RVH 2500 L	2500 (104)	2,50	0,28	1695	512	525	160	1700x946x1536 7,33 / 8,25 344
RVH 3000 L	3000 (125)	3,00	0,34	1730	675	525	220	1700x946x1536 7,33 / 8,25 344
RVH 6000 L	6000 (250)	6,00	0,52	1860	1450	586	320	2200x1300x1810 14,64 / 16,73 1000
RVH 9000 L	9000 (375)	9,00	0,52 0,34	1863	1456	1572	600	2200x1300x1810 14,64 / 16,73 1000 1700x 946x1536 7,33 / 8,25 344
RVH 12000 L	12000 (500)	12,00	0,52 0,52	1863	1456	1572	700	2200x1300x1810 14,64 / 16,73 1000 2200x1300x1810 14,64 / 16,73 1000

Flake ice machines with separate condensing unit R449A up to approx. +42°C R404A up to approx. +45°C

RVH-LT

Technical details

Type	Ice output *) kg / 24 h (1 h)	Fresh water consumption m³/24h	Electrical connection RVH 3AC/50Hz/400V/N/PE kW	Width mm	Depth mm	Height mm	Weight approx. kg	Condensing unit "LT" dimensions WxDxH mm Electrical connection kW R449A/R404A Weight approx. kg
RVH 250 LT	250 (10)	0,25	on demand					
RVH 400 LT	400 (16)	0,40	0,28	1185	512	525	85	1032x462x751 2,14 / 2,39 90
RVH 800 LT	800 (33)	0,80	0,28	1345	512	525	125	1352x732x891 2,75 / 3,11 170
RVH 1000 LT	1000 (41)	1,00	0,28	1545	512	525	145	1352x732x1201 4,09 / 4,69 262
RVH 1500 LT	1500 (62)	1,50	0,28	1695	512	525	160	1352x732x1201 5,78 / 6,45 262
RVH 2000 LT	2000 (83)	2,00	0,28	1695	512	525	160	1700x946x1536 7,33 / 8,25 344
RVH 2500 LT	2500 (104)	2,50	0,28	1695	512	525	160	1900x882x1561 8,89 / 10,11 480
RVH 3000 LT	3000 (125)	3,00	0,34	1730	675	525	220	1900x882x1561 8,89 / 10,11 480
RVH 6000 LT	6000 (250)	6,00	0,52	1860	1450	586	320	2800x1300x2275 21,73 / 25,26 1200
RVH 9000 LT	9000 (375)	9,00	0,52 0,34	1863	1456	1572	600	2800x1300x2275 21,73 / 25,26 1200 1900x 882x1561 8,89 / 10,11 480
RVH 12000 LT	12000 (500)	12,00	0,52 0,52	1863	1456	1572	700	2800x1300x2275 21,73 / 25,26 1200 2800x1300x2275 21,73 / 25,26 1200

Special voltage on demand.

Supplied without refrigerant filling. Suction line heat exchanger enclosed separately.

*) The indicated ice output is an approximate value (depending on installation conditions).

Water temperature +16°C, ambient temperatures +20°C; higher temperatures may lead to reduced ice output.

**) R449A / R404A belong to the fluorinated greenhouse gases.

Connections: Water supply 3/4" external thread, drain water 1" hose clip

MAJA®

Flake ice producing unit (rotating evaporator) **RVH** without condensing unit, for connection to an external condensing unit or refrigeration system. Compact, space-saving structure.

Ice output 250 - 12000 kg / 24 h



RVH 1500

RVH 12000

Flake ice machines without condensing unit

RVH

Equipment & features

Machine structure:

- Cleaning-friendly machine design according to the principle of HY-GEN sanitation with removable water tank.
- For connection to (separate) external refrigeration units or multicompressor refrigeration systems.
- RVH 9000 and RVH 12000 consist of two separately operated rotating evaporator units. Advantages: individual control of ice output according to varying needs and high operational safety.

Refrigeration:

- For operation with the fluorinated greenhouse gases R449A (GWP 1397) or R404A (GWP 3922). Other refrigerants on demand.

Easy operation:

- By control panel ON/OFF for remote operation; see p. 16 for more control panels with or without program function.



RVH 12000

Technical details

Type	Ice output *) kg / 24 h (1 h)	Fresh water consumption m³/24 h	Refrigeration capacity required kW	Electrical connection 3AC/50Hz/400V/PE kW	Width mm	Depth mm	Height mm	Weight kg approx.
RVH 250	250 (10)	0,25	t ₀ -20,0°C, 1,8	0,28	1045	512	525	80
RVH 400	400 (16)	0,40	t ₀ -20,5°C, 2,2	0,28	1185	512	525	85
RVH 800	800 (33)	0,80	t ₀ -21,5°C, 4,0	0,28	1345	512	525	125
RVH 1000	1000 (41)	1,00	t ₀ -18,5°C, 5,6	0,28	1545	512	525	145
RVH 1500	1500 (62)	1,50	t ₀ -18,5°C, 8,4	0,28	1695	512	525	160
RVH 2000	2000 (83)	2,00	t ₀ -21,5°C, 11,5	0,28	1695	512	525	160
RVH 2500	2500 (104)	2,50	t ₀ -21,5°C, 13,5	0,28	1695	512	525	160
RVH 3000	3000 (125)	3,00	t ₀ -21,0°C, 16,2	0,34	1730	675	525	220
RVH 6000	6000 (250)	6,00	t ₀ -22,0°C, 33,0	0,52	1860	1450	586	320
RVH 9000	9000 (375)	9,00	t ₀ -22,0°C, 33,0 t ₀ -21,0°C, 16,2	0,52 0,34	1863	1456	1572	600
RVH 12000	12000 (500)	12,00	t ₀ -22,0°C, 33,0 t ₀ -22,0°C, 33,0	0,52 0,52	1863	1456	1572	700

Special voltage on demand.

*) The indicated ice output is an approximate value (depending on installation conditions). Water temperature +16°C, ambient temperatures +20°C; higher temperatures may lead to reduced ice output.

**) R449A / R404A belong to the fluorinated greenhouse gases. Supplied without refrigerant filling.

For optimized working conditions concerning ice capacity and ice quality a suction line heat exchanger is necessary.

Connections: Water supply 3/4" external thread, drain water 1" hose clip

Flake ice machines (rotating heat exchangers) **RVH-F** without condensing unit, for connection to a heat transfer medium circuit.
Ice output 2.000 - 8.000 kg / 24 h



Flake ice machines for connection to a heat transfer medium circuit

RVH-F

Equipment & features

Machine structure:

- Cleaning-friendly machine design according to the principle of HY-GEN sanitation with removable water tank.
- For connection to an existing external heat transfer medium circuit (by fluid, e.g. water-glycol mixture). An ecological and future-proof alternative to the traditional refrigerants.

Eco-friendly flake ice production:


- No influence on the destruction of the ozone layer and the greenhouse effect.
Ozone depletion potential ODP = 0
Global warming potential GWP = 0

Easy operation:

- By control panel ON/OFF for remote operation; see page 16 for a big variety of control panels with or without program function.

Installation conditions

- Temperature of heat transfer fluid:
 t_{IN} approx. -25°C
 t_{OUT} approx. -22°C

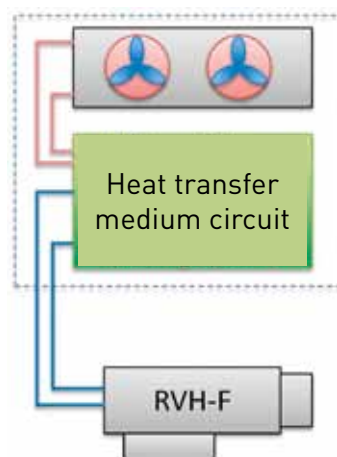

Technical details

Type	Ice output*) kg/24h (1 h)	Water consumption (fresh water) m ³ /24h	Refrigeration capacity required kW **)	Electrical connection 3AC/50Hz/400V/PE kW	Width mm	Depth mm	Height mm	Weight approx. kg
RVH 2000 F	2000 (83)	2,0	11,0	0,34	1730	675	525	220
RVH 4000 F	4000 (166)	4,0	22,0	0,52	1860	1450	586	320
RVH 6000 F	6000 (250)	6,0	11,0 + 22,0	0,34 + 0,52	1863	1456	1572	600
RVH 8000 F	8000 (333)	8,0	22,0 + 22,0	0,52 + 0,52	1863	1456	1572	700

Special voltage on demand.

*) The indicated ice output is an approximate value (depending on installation conditions).

Water temperature $+16^{\circ}\text{C}$, ambient temperatures $+20^{\circ}\text{C}$; higher temperatures may lead to reduced ice output.

**) t_{in} approx. -25°C , t_{out} approx. -22°C

Connections:

Water supply 3/4" external thread, drain water 1" hose clip

MAJA[®]

Flake ice producing unit (rotating evaporator) **RVH-NH3** without condensing unit, for direct operation with an ammonia / R717 multicompressor refrigeration unit. For ecological and sustainable ice production projects. Ice output 7000 and 14000 kg / 24 h



RVH 12000 NH3



Flake ice machine for direct ammonia operation NH₃ (R717)

RVH-NH3

Equipment & features

Optimum energy efficiency - increased power density:

- Compared to traditional refrigerants, e.g. R404A, the direct ammonia operation brings more power density, thus increased ice output with the same machine scale.
- Electronic evaporation pressure regulation for optimum evaporation efficiency.
- The RVH 12000 NH3 consists of two separately operated rotating evaporator units. Advantages: individual control of ice output according to varying needs and high operational safety.

Eco-friendly flake ice production:

- Excellent ecological impact by the use of the natural refrigerant R717 (ammonia / NH₃).
- R717 consists of the elements nitrogen and hydrogen, gases which are natural parts of the earth atmosphere.
- No influence on the destruction of the ozone layer, no influence on the greenhouse effect:
Ozone depletion potential ODP = 0
Global warming potential GWP = 0

High safety standard:

- Integrated safety system with gas detector and automatic cutoff and blockage in case of leakage.

Easy operation by Control Panel Touch (control unit with touch display):

- Individual placing of the control unit.
- With timer function for freely programmable production and cleaning cycles (with option MAJA-SCS self-cleaning system), for having the right quantity of fresh MAJA Flake Ice at your disposal exactly in time (see page 16).

Installation conditions:

- Existing R717 multicompressor refrigeration unit working in pump operation, that means the refrigerant becomes liquid and circulates.
- Ammonia temperature approx. -30°C
- Pump pressure 2 – 4 bar

Technical details

Type	Ice output *) kg/24h (1 h)	Water consumption (fresh water) m ³ /24h	Refrigeration capacity required	Electrical connection 3AC/50Hz/400V/PE kW	Width mm	Depth mm	Height mm	Weight approx. kg
RVH 6000 NH3	7000 (291)	7,0	t ₀ -30,0°C, 42 kW	0,96	1860	1450	586	330
RVH 12000 NH3	14000 (583)	14,0	t ₀ -30,0°C, 84 kW	2 x 0,96	1863	1456	1572	720

Special voltage on demand.

*) The indicated ice output is an approximate value (depending on installation conditions). Water temperature +16°C, ambient temperatures +20°C; higher temperatures may lead to reduced ice output.

Connections: Water supply 3/4" external thread, drain water 1" hose clip

Flake ice producing unit (rotating evaporator) **RVH-CO2** without condensing unit, for direct carbon dioxide operation with a R744 multicompressor refrigeration unit. For ecological and sustainable ice production projects. Ice output 500 - 15200 kg / 24 h



RVH 1500 CO2



Flake ice machine for direct carbon dioxide operation CO₂ (R744)

RVH-CO2

Equipment & features

Optimum energy efficiency - increased power density:

- Compared to traditional refrigerants, e.g. R404A, the direct carbon dioxide operation brings more power density, thus increased ice output of up to 30 % compared with the same machine scale.
- Electronic expansion valve for optimum evaporation efficiency.

Eco-friendly flake ice production:

- Excellent ecological impact by the natural refrigerant R744 (carbon dioxide / CO₂) for flake ice production. ODP = 0, GWP = 1
- R744 consists of the elements carbon and oxygen, which are natural parts of the atmosphere.

Easy operation by Control Panel Touch:

- With timer function for freely programmable production and cleaning cycles (with option MAJA-SCS)

Installation conditions:

- Subcritical R744 circuit $HP_{max} = 90$ bar, $LP_{max} = 28$ bar; other conditions on demand.
- Evaporation pressure regulator to adapt the evaporation temperature to $t_0 = \text{approx. } -25^{\circ}\text{C}$
- Stop valve liquid line and suction line.
- Pressure relief valve with interchangeable valve for maintenance.
- If necessary, R744 gas detector (depending on the local situation at the place of installation).

Option

■ Hybride solution RVH-CO2 HYBRID:

Ideal for customers who are interested in investing already now in a RVH-CO2 and to operate it with an existing R449A or R404A circuit as an interim solution until final refit of the whole refrigeration system.

Technical details

Type	Ice output *) kg/24h (1 h)	Water consumption (fresh water) m ³ /24h	Refrigeration capacity required	Electrical connection 3AC/50Hz/400V/PE kW	Width mm	Depth mm	Height mm	Weight approx. kg
RVH 400 CO2	500 [21]	0,5	t ₀ -25,0°C, 2,8 kW	0,28	1185	512	525	85
RVH 800 CO2	1000 [41]	1,0	t ₀ -25,0°C, 5,5 kW	0,28	1345	512	525	125
RVH 1000 CO2	1300 [54]	1,3	t ₀ -25,0°C, 7,3 kW	0,28	1545	512	525	145
RVH 1500 CO2	1900 [79]	1,9	t ₀ -25,0°C, 10,7 kW	0,28	1695	512	525	160
RVH 2000 CO2	2500 [104]	2,5	t ₀ -25,0°C, 14,4 kW	0,28	1695	512	525	160
RVH 2500 CO2	3000 [125]	3,0	t ₀ -25,0°C, 16,2 kW	0,28	1695	512	525	160
RVH 3000 CO2	3800 [158]	3,8	t ₀ -25,0°C, 20,5 kW	0,34	1730	675	525	220
RVH 6000 CO2	7600 [317]	7,6	t ₀ -25,0°C, 41,0 kW	0,52	1860	1450	586	320
RVH 9000 CO2	11400 [475]	11,4	t ₀ -25,0°C 41,0 kW + 20,5 kW	0,52 + 0,34	1863	1456	1572	600
RVH 12000 CO	15200 [634]	15,2	t ₀ -25,0°C 41,0 kW + 41,0 kW	0,52 + 0,52	1863	1456	1572	700

Special voltage on demand.

*) The indicated ice output is an approximate value (depending on installation conditions). Water temperature +16°C, ambient temperatures +20°C; higher temperatures may lead to reduced ice output.

Connections: Water supply 3/4" external thread, drain water 1" hose clip



MAJA Flake Ice Machines:

Overview about the complete range

FLAKE ICE MACHINES	Ice output kg/24h	Condensing unit		
		Compact machine	Split installation	Without condensing unit
SAH 85 L - SAH 3000 L	85 - 3000	●		
SAH 250 W - SAH 3000 W	250 - 3000	●		
SAH 500 WS - SAH 3000 WS	500 - 3000	●		
SAH 500 L R449A - SAH 3000 L R449A	500 - 3000	●		
SAH 500 W R449A - SAH 3000 W R449A		●		
SAH 500 WS R449A - SAH 3000 WS R449A		●		
RVH 250 L - RVH 12000 L -15°C to approx. +38°C	250 - 12000		●	
RVH 250 LT - RVH 12000 LT -15°C to approx. +42°C (+45°C)			●	
RVH 800 W - RVH 12000 W -15°C to approx. +38°C	800 - 12000		●	
RVH 800 WS - RVH 12000 WS -15°C to approx. +38°C			●	
RVH 250 - RVH 12000	250 - 12000			●
RVH 250 N - RVH 12000 N (without control unit)	250 - 12000			●
RVH 2000 F - RVH 8000 F	2000 - 8000			●
RVH 6000 NH3 - RVH 12000 NH3	7000 + 14000			●
RVH 400 CO2 - RVH 12000 CO2	500 - 15200			●
RVE 702 S - RVE 3102 S ship version (integral water tank)	750 - 2900			●

Machine types

- **Compact machines with integrated condensing unit** (SAH), for ambient temperatures from approx. +10°C to +38°C
- **Split version for separate installation of condensing unit and ice producing unit** (RVH-L, RVH-LT, RVH-W, RVH-WS)
- **Ice producing units without condensing unit for connection to an existing multicompressor refrigeration system** (RVH, RVH-N, RVH-NH3, RVH-CO2, RVH-F).
- **Ice producing units with integral water tank for installation on fishing vessels** without condensing unit for seagoing use onboard of fishing vessels (RVE-2S)

Refrigeration of condensing unit

- **L** = refrigeration by air for standard ambient temperatures from approx. -15°C to +38°C
- **LT** = refrigeration by air for ambient temperatures from approx. -15°C to +42°C for R449A and from approx. -15°C to +45°C for R404A.
- **W** = refrigeration by water for a temperature difference of IN / OUT of approx. 10 - 20 K
- **WS** = refrigeration by heat transfer medium or water for a temperature difference IN / OUT of fluid / water of about 5 K ($t_{min} - 8^{\circ}\text{C}$).

A big choice of machine types allows individual solutions for special customer requirements.

Refrigeration of condensing unit			Refrigerant				Heat transfer fluid
Air	Water	Heat transfer medium	R404A	R449A	R744 (CO ₂)	R717 (NH ₃)	Fluid
•			•				
	•		•				
		•	•				
•				•			
	•			•			
		•		•			
•			•	•			
•			•	•			
	•		•	•			
		•	•	•			
			•	•			
			•	•			
							•
						•	
					•		
			•	•			

Heat transfer medium / fluid

- Standard refrigerants for MAJA Flake Ice Machines: **R449A (GWP 1397)** and **R404A (GWP 3922)**. They belong to the fluorinated greenhouse gases. Use of other refrigerants on demand.

- Already since 2008, MAJA can also supply ice machine ranges for operation with natural refrigerants without ecological impact:

R717 / NH₃ (ODP = 0, GWP = 0)

R744 / CO₂ (ODP = 0, GWP = 1)

- Alternative refrigerant solution:

Heat transfer fluid (ODP = 0, GWP = 0)



MAJA Flake Ice Machines: Individual configuration for meeting with any requirements.

Different types of control units

Type	ON/OFF pushbuttons illuminated, integrated into machine frame	Control Panel ON/OFF with wall support and 5 m cable for remote operation	Control Panel Timer with timer function	Control Panel Standard	Control Panel Touch 5 m cable
SAH 85 / 170	Standard	Optional	Optional	---	---
SAH 250 / 500	Standard	Optional	Optional	---	---
SAH 800 - 3000	---	---	---	Standard	Optional
RVH-L / RVH-LT / RVH-W / RVH-WS	---	---	---	Standard	Optional
RVH / RVH-F	---	---	---	Standard	Optional
RVH-CO2	---	---	---	---	Standard
RVH-NH3	---	---	---	---	Standard



ON/OFF buttons



Control Panel ON/OFF



Control Panel Timer



Control Panel Standard



Control Panel Touch
(touch display)

Control Panel Touch

- Well-arranged presentation of the control and display elements
- Easy operation, input directly on the display
- Programming of automatic start and stop times
- Programming of automatic cleaning cycles (only with option MAJA-SCS self-cleaning system)
- Fast and easy change of language
- Display of additional information
- Residue water outlet (manual)
- Sanitation report
- Automatic restart of the machine after electricity / water cutoff

- Visualization of state of sanitation
- Checkup after manual cleaning "All components correctly placed?"
- Error code indication on the display in clear text
- Display error memory
- Degree of protection IP 65

Optionally available:


- Protective cover for touch display
- Length of cable 5, 10 and 18 m



Protective cover for
Control Panel Touch




Sanitation options

- **Patented evaporator self-cleaning system MAJA-SCS** (see page 3):
For sanitation safety at the push of a button; fully automatic cleaning, descaling and reduction of germs of all machine parts that contact water.
- **External UV-disinfection system in the water supply:**
For making sure that only hygienically perfect water is used for flake ice production.

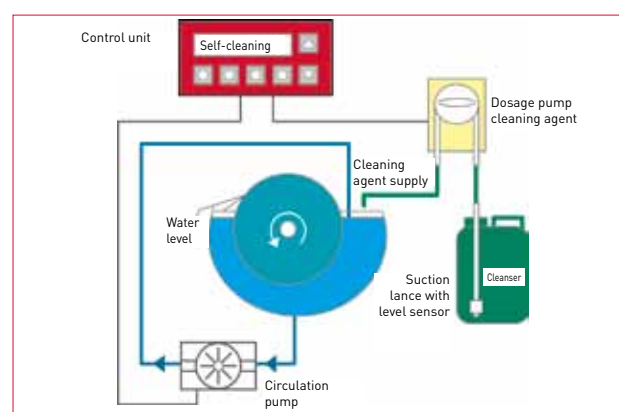

A big variety of installation options allow tailor-made solutions.

Examples of installation



Installation accessories

■ Consoles:

Special consoles (picture 1 + 2) allow the wall fixation of the SAH compact ice machines up to 500 kg, of the RVH ice producing units up to 3000 kg as well as of the condensing units L/LT 800 - 3000. They can be combined with different chute systems so that the ice falls directly into storage bins, ice transport carts or directly into a supermarket ice display (picture 5).

■ Subframes:

To allow the individual installation of the ice machines, different types of subframes are available suitable for the use of one or two ice transport carts (picture 3 + 4).


■ Ice chutes:

Modular chute systems allow a lot of different installation options for MAJA Ice Machines, starting from a simple chute extension, until an automatic Y-chute system with two ice extraction points (picture 6), which can also be supplied with manual blocker allowing to chose the cart to be filled (picture 7).

Further accessories: wall holding devices for chutes, photoelectric barriers, reflection light sensors for ice level control in the reservoir, etc.



RVH on wall console with vertical chute



RVH on wall console with inclined chute



SAH 250/500 on subframe UG 250/500 for cart EVA 75



RVH on universal subframe for two ice transport carts EVA 75



Chutes for direct filling of supermarket displays with flake ice



RVH on wall console with Y chute for two ice outlets



Extension chute with manual blocker and ice transport carts EVA

MAJA[®]

Ice handling and storage

Ice carts for transport and storage:

Different mobile ice collection systems allow the convenient transport and the temporary storage of MAJA Flake Ice:

The cart types EV 50, EVA 75 and EVF 201 are equipped with thermal insulation for an optimum conservation of the MAJA Flake Ice during a certain period of time.

The cart types EVL are not insulated and made for short distance ice transportation.

For all types of ice carts special covers are available (option) for protecting the ice from contamination during transport and storage.



Stackable ice bins
EV 50 on wheeled base



Ice transport cart EVA 75 for
about 75 kg of MAJA Flake Ice



Useful equipment:
Ice shovels (white or blue)
made from food safe plastics



EVL 250 / 440, the basic solution
for the transport of about 105 /
185 kg of MAJA Flake Ice



EVF 201 carts for ITS silos
Option: set with 6 ice buckets,
each for about 11 kg of flake ice.

Carts for ice transport & storage

Type	Maximum ice capacity kg	Width mm	Depth mm	Height mm	Weight kg	Suitable for
EV 50	50	615	650	661	20,0 (incl. wheeled base)	SAH 85/170
EVA 75	75	680	800 (with handle)	680	20,5	Subframes + ITS-K silos, instead of standard mincer carts
EVF 201	90	649	1055 (with handle)	712 (889 with handle)	25,5	ITS silos
EVL 250	105	624	884	753	25,0	Subframes
EVL 440	185	780	1100	841	36,0	Subframes

Ice storage

Storage bins and silo systems:

If MAJA Flake Ice has to be produced on stock, the quality of the ice and its durability depend significantly on the storage conditions. The MAJA silo bins are equipped with thermal insulation to minimize the melting process.

The silo surfaces are easy to clean. Drain valves allow the evacuation of melting and cleaning water for sanitary ice storage conditions. Besides that, the silo ranges EN and ITS simplify the ice handling.

The silo EN1 and all ITS-silos are equipped with a comfortable door to take out the ice by hand. Besides that, the ITS-silos have a silo bottom scuttle. When unlocking, the ice falls automatically into the ice storage carts below the silo.

For fully automatic ice extraction and dosage of portion control ice batches, learn more about MAJA's automatic ice silo systems at page 20.



SAH 250/500 on silo EN 1



Silo ITS 1350-60 including
2 ice carts EVF 201



Silo ITS 1350-60 K for the use
of 2 standard mincer carts

Silo EN1

Type	Max. storage capacity approx. kg (l)	Width mm	Depth mm	Depth with door mm	Height mm	Weight kg
EN 1	185 (430)	762	788	991 - 1258	1093	94

ITS silos with ice storage cart/s EVF

Type	Max. silo storage capacity approx. kg	Max. storage capacity (including EVF 201 cart/s) kg	Width mm	Depth mm	Depth with door mm	Height mm	Weight (without cart/s) kg	Number of ice cart/s (included in delivery)
ITS 500-31	227	317	788	1016	---	1524	186	1
ITS 700-31	318	408	788	1016	1220 - 1486	1905	217	1
ITS 1350-60	612	792	1524	1016	1220 - 1486	1905	378	2
ITS 2250-60	955	1135	1524	1016	1220 - 1486	2464	412	2
ITS 3250-90	1474	1744	2286	1016	1220 - 1486	2464	642	3

ITS silos for standard mincer carts

Type	Max. storage capacity approx. kg	Width mm	Depth mm	Depth with door mm	Height mm	Weight kg	Number of mincer carts (not included in delivery)
ITS 500-31 K	227	863	1016	---	1587	210	1
ITS 700-31 K	318	863	1016	1220 - 1486	1949	270	1
ITS 1350-60 K	612	1673	1016	1220 - 1486	1949	425	2
ITS 2250-60 K	955	1673	1016	1220 - 1486	2626	471	2
ITS 3250-90 K	1474	2483	1016	1220 - 1486	2626	692	3

Wherever big quantities of flake ice must be handled, the use of automatic silo systems is recommended. The time-consuming and labor-intensive manual shovelling of tons of flake ice is no longer necessary thanks to fully automatic extraction and weighing solutions.



Flake ice storage systems with automatic dispensation: highly economical and sanitary.

AS

Equipment & features

- The ice produced by the MAJA flake ice machine installed on the silo cover, falls into the silo for intermediate storage. At the push of a button, the required ice quantity is automatically extracted by means of solid spiral conveyors.
- **Improved sanitary conditions:**
No manual ice handling, no contact with external tools!
- The silo frame, internal and external housings as well as the spiral conveyors are made from stainless steel.
- Different optional accessories are available for offering for each special application the optimum solution, allowing economical process optimization.
- With interface for installing a floor balance.



Automatic flake ice silos type AS

Type	Storage capacity approx. m³ (kg)	Number of spiral conveyors	Width mm	Depth mm	Height mm	Silo weight (unloaded) kg	Max. silo cover load kg	Electrical connection kW 3AC/50Hz/N/PE/400V
AS 21	2,1 (800)	2	1451	3811	2473	1500	1000	2,0
AS 30	3,0 (1200)	2	1451	3811	2973	1500	1000	2,0
AS 45	4,5 (1800)	2	1451	3811	3723	1750	1000	2,0
AS 50	5,0 (2000)	3	1642	4342	3229	2350	1500	3,8
AS 63	6,3 (2600)	3	1642	4342	3729	2500	1500	3,8
AS 72	7,2 (3000)	3	1796	4824	3282	2950	1500	3,8
AS 77	7,7 (3200)	3	1642	4342	4229	2700	1500	3,8
AS 92	9,2 (3800)	3	1796	4824	3782	3150	1500	3,8
AS 112	11,2 (4600)	3	1796	4824	4282	3300	1500	3,8

Examples for options & accessories

- Digital ice level indication (approx. 1 % precision)
- Further options on demand.

AS silo with pneumatic ice dispensation

Filling your flake ice display has never been more comfortable!

One or several MAJA Flake Ice Machines are installed on top of a stainless steel AS-silo, in which the flake ice is stored until its extraction. A spiral conveyor in the silo delivers the ice to a dosage system. Thanks to pneumatics, the display is filled with flake ice by means of a dosing tube - fast, easy and comfortable.

- **Reduced manual labor:**

No longer manual shovelling of tons of flake ice! Simplified work for the staff, better working conditions.

- **Time savings:**

No internal transportation of the flake ice from the place of production to the display.

- **Improved sanitation:**

Less contact of the staff with the ice. Silo and spiral conveyor made in solid stainless steel.



Portion control ice batches:
Precise weight for reliable processes.


VS

Intelligent ice management for excellent sanitary conditions and increased efficiency:

The MAJA Ice Weighing Systems of the VS range allow the hygienic storage and dosage of precise flake ice batches. Processors gain more benefit by automating the complete ice application, starting from the flake ice production until the ice dispensation directly into the process (e.g. baking industry).

Equipment & characteristics

- Storage capacity approx. 300 kg of MAJA Flake Ice, ambient temperature max. +15°C
- Ice dosage by two solid stainless steel spiral conveyors
- Individual adjustment of batch volume and batch quantity, depending on the installed ice machine's capacity.
- Short batch weighing process, e.g.:
approx. 25 sec. for 10 kg
approx. 40 sec. for 20 kg
- Weight accuracy +/- 250 g (depending on ambient conditions), thus precise temperature adjustment (e.g. for dough production)
- Touch display for manual input of the desired batch weight.
Option: full process automation by connection to a super-ordinated recipe control system.
- Reliable process and traceability
- Time savings by automatic dosage

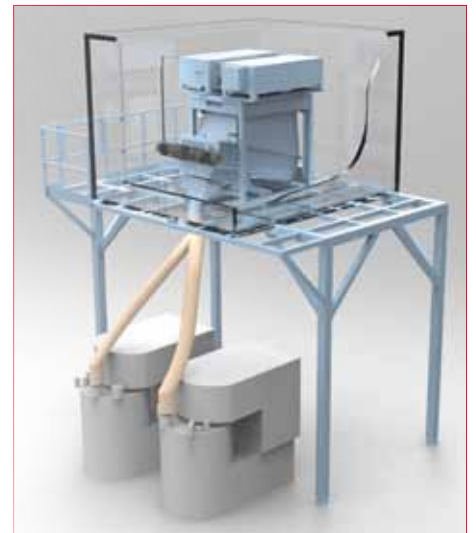

Example of installation:
Ice dosage system VS5 with 2 RVH 3000

Flake ice machines (rotating evaporators) **RVE-2S** without condensing unit, for connection to an existing refrigeration system for seagoing use onboard of fishing vessels.
With built-in water tank.
Ice output 750 - 2.900 kg / 24 h



Flake ice machines for fishing vessels: Made for seagoing use in the fishing industry.

Equipment & features

Special flake ice machine range for operation on fishing vessels:

- Made for the trouble-free flake ice production under special conditions at sea, where the quality of the catch depends on the continuous availability of ice and refrigeration.
- Suitable for fresh water or seawater freezing
- For connection to an existing R404A **) refrigeration system
- With maintenance-friendly electro-mechanical controls
- Compact machine size

Special seagoing machine execution:

- Built-in water tank (non removable), with slap-over protection for trouble-free ice production even in rough sea.
- Increased protection from corrosion for operation in salt-laden ambience, e.g. non-corroding evaporator, housing in stainless steel 1.4571 (AISI 316Ti; formerly V4A)



Accessories & options

- **Water tank heating** for protection from freezing damages caused by ambient temperatures below +6°C or water temperatures below +8°C
- **ON/OFF remote control unit** with 5 m cable

Technical details

Type	Ice output *) kg/24h (1 h)	Water consumption m³/24h	Refrigeration capacity required	Electrical connection 3AC/50Hz/400V/PE kW	Width mm	Depth mm	Height mm	Weight kg
RVE 702 S fresh water	1100 (45)	1,10	t ₀ -20,0°C, 6,7 kW	0,47	1210	884	640	180
RVE 702 S seawater	750 (31)	0,75	t ₀ -33,0°C, 4,8 kW	0,35	1210	884	640	180
RVE 1702 S fresh water	2000 (83)	2,00	t ₀ -20,0°C, 12,0 kW	0,47	1410	884	640	205
RVE 1702 S seawater	1700 (70)	1,70	t ₀ -33,0°C, 9,5 kW	0,35	1410	884	640	205
RVE 3102 S fresh water	2900 (120)	2,90	t ₀ -21,0°C, 16,2 kW	0,47	1580	884	640	215
RVE 3102 S seawater	2200 (91)	2,20	t ₀ -33,0°C, 13,0 kW	0,47	1580	884	640	215

Special voltage on demand. Without refrigerant charge.

*) The indicated ice output is an approximate value (depending on installation conditions).
Water temperature +16°C, ambient temperatures +20°C

**) R404A: fluorinated greenhouse gas GWP 3922

Connections: Water supply 3/4" external thread, drain water 1" hose clip

MAJA®



Ice is important for the refrigeration, the presentation and the production of foodstuff. If you prefer either the fine, mat-white flake ice or the shiny, granular nugget ice - at MAJA it's up to you which ice will suit you best for your individual requirements!

Production of MAJA Nugget Ice:

An evaporator screw rotates in an evaporation drum, which is filled with water and refrigerated from outside. The water freezes on the inner drum surface to small ice particles, which are scraped off by the rotating evaporator screw and conveyed upwards. The ice passes through an extrusion die and gets like that its characteristic nugget shape.

MAJA Nugget Ice for the food business: Long freshness, attractive appearance and easy handling!

Versatile applications for MAJA Nugget Ice:

- **Food trade / retail**
Refrigeration and presentation of fish and fresh food in supermarket displays.
- **Catering, hotels, restaurants, roadhouses, petrol stations, events...**
Refrigeration of foodstuff and drinks, eyecatcher for the appetizing presentation of different food.
- **Bars & clubs**
Refrigeration and mixing of drinks and cocktails.
- **Baking business**
Dough production of baking and pastry products.
- **Fish business**
Refrigeration of fish and seafood during transport and sales.
- **Vegetables**
Refrigeration of vegetables after the harvest, during transportation, in the distribution and retail.

Special characteristics of MAJA Nugget Ice:

- **Ice temperature**
Approx. $-0,5^{\circ}\text{C}$, thus ideal cooling for versatile application fields of MAJA Nugget Ice.
- **Characteristics**
Density approx. $0,5 \text{ kg} / \text{dm}^3$, shiny, unregularly shaped nuggets, granular structure. That's why MAJA Nugget Ice has a very appetizing appearance.
- **Storage properties**
MAJA Nugget Ice can be stocked in insulated storage bins. It can be stored in a cold-room at low temperatures above 0°C for several days, remaining loose and easy to dose.



MAJA Nugget Ice Machines NA:

Different machine ranges and useful accessories are available to meet with individual customer requirements.

Ice output 175 - 1420 kg / 24 h



NA 175



NA 300 / 530



NA 970

MAJA Nugget Ice Machines: For every requirement the best solution.

NA

Equipment & features of MAJA Nugget Ice Machines

■ Solid execution:

Front / side panels, ground plate, top cover and ice chute made from stainless steel.

■ Easy operation:

ON/OFF pushbuttons

LED-display for indication of operation modes (pict. 1).

■ Sanitary nugget ice production:

All NA machine types are now available with the option MAJA-SCS, the patented self-cleaning system for improved sanitation conditions (see options page 26).



pict. 1

MAJA Nugget Ice Machines NA-L



Machine structure:

- Compact machines with integrated condensing unit, ready for plug & play

Refrigeration:

- Integrated condensing unit, air-cooled execution (L)
- Water-cooled execution (W) on demand.
- Refrigerant of NA 175 L / NA 300 L: propane R290 (GWP 3)
- Refrigerant of NA 530 L / NA 970 L: R404A (GWP 3922) **)



Technical details

Type	Ice output *) kg / 24 h (1 h)	Water consumption (fresh water) m³/24 h	Electrical connection 1AC/50Hz/230V/N/PE kW	Width mm	Depth mm	Height mm	Refrigerant charge kg	GWP **)	CO2e t	Weight kg approx.
NA 175 L R290	175 (7)	0,175	0.80	560	511	618	< 0,15	3	< 0,5	56
NA 300 L R290	300 (12)	0,30	1,15	750	561	756	< 0,15	3	< 0,5	109
NA 530 L R404A	530 (22)	0,53	1,90	750	561	756	0,75	3922	2,9	113
Type	Ice output *) kg / 24 h (1 h)	Water consumption (fresh water) m³/24 h	Electrical connection 3AC/50Hz/400V/N/PE kW	Width mm	Depth mm	Height mm	Refrigerant charge kg	GWP **)	CO2e t	Weight kg approx.
NA 970 L R404A	970 (40)	0,97	3,60	900	626	946	1,2	3922	4,7	168

*) The indicated ice output is an approximate value (depending on installation conditions).

Water temperature +10°C, ambient temperatures +10°C; higher temperatures may lead to reduced ice output. Detailed information on demand.

**) R404A belongs to the fluorinated greenhouse gases.

Connections:

Water supply 3/4" external thread, drain water 3/4" hose clip

MAJA Nugget Ice Machines NA



Machine structure:

- Without condensing unit, for connection to an external refrigeration unit or a multicompressor circuit.

Refrigeration:

- For refrigerants R449A (GWP 1397) or R404A (GWP 3922) **)

Technical details

Type	Ice output *) kg / 24 h (1 h)	Water consumption (fresh water) m³/24 h	Electrical connection 1AC/50Hz/230V/N/PE kW	Refrigeration capacity required kW	Width mm	Depth mm	Height mm	Weight kg approx.
NA 300	300 [12]	0,30	0,3	1,25 t ₀ = -18°C (+/-1K)	750	561	756	78
NA 530	530 [22]	0,53	0,4	1,85 t ₀ = -18°C (+/-1K)	750	561	756	82

Type	Ice output *) kg / 24 h (1 h)	Water consumption (fresh water) m³/24 h	Electrical connection 3AC/50Hz/400V/N/PE kW	Refrigeration capacity required kW	Width mm	Depth mm	Height mm	Weight kg approx.
NA 970	970 [40]	0,97	0,6	3,5 t ₀ = -18°C (+/-1K)	900	626	946	121

MAJA Nugget Ice Machines NA-CO2



Machine structure:

- Without condensing unit, for direct operation with a R744 / CO₂ refrigeration unit
HP_{max} = 90 / 52 bar, LP_{max} = 60 bar.
- Compared to other traditional refrigerants (e.g. R404A) the carbon dioxide operation brings more power density.

Eco-friendly flake ice production:

- Excellent ecological impact by the use of the natural refrigerant R744 (carbon dioxide / CO₂) for flake ice production.
- R744 consists of the elements carbon and oxygen, which are natural parts of the atmosphere. It has almost no influence on the destruction of the ozone layer and on the global warming effect:
Ozone depletion potential ODP = 0
Global warming potential GWP = 1



Technical details

Type	Ice output *) kg / 24 h (1 h)	Water consumption (fresh water) m³/24 h	Electrical connection 1AC/50Hz/230V/N/PE kW	Refrigeration capacity required kW	Width mm	Depth mm	Height mm	Weight kg approx.
NA 440 CO2	440 [18]	0,44	0,3	1,8 t ₀ = -18°C (+/-1K)	750	561	756	78
NA 780 CO2	780 [32]	0,78	0,4	2,7 t ₀ = -18°C (+/-1K)	750	561	756	82

Type	Ice output *) kg / 24 h (1 h)	Water consumption (fresh water) m³/24 h	Electrical connection 3AC/50Hz/400V/N/PE kW	Refrigeration capacity required kW	Width mm	Depth mm	Height mm	Weight kg approx.
NA 1420 CO2	1420 [59]	1,42	0,6	5,1 t ₀ = -18°C (+/-1K)	900	626	946	121

*) The indicated ice output is an approximate value (depending on installation conditions).

Water temperature +10°C, ambient temperature +10°C. Higher temperatures may lead to reduced ice output. Detailed information on demand.

**) R449A and R404A belong to the fluorinated greenhouse gases.

Connections:

Water supply 3/4" external thread, drain water 3/4" hose clip



Sanitation accessories

■ Optional water filter system (pict. 1):

MAJA recommends using a water filter system to protect the machine from sediment and limescale deposit for better sanitation. Suitable systems are available from MAJA. They filter out floating particles and reduce the risk of limescale deposit, which has positive effects on the machine's life cycle and state of hygiene.



pict. 1

■ Optional self-cleaning system MAJA-SCS:

MAJA Nugget Ice Machines are available with self-cleaning system to allow ideal conditions for the production of ice used for the production or refrigeration of foodstuff. Thanks to the patented evaporator self-cleaning system MAJA-SCS, the ice producing unit can be regularly cleaned without investing additional working time or labour.

A mixture of water and MAJA-CITRO, a special cleaning agent, flows around all machine parts that contact water, thus cleaning, deliming and reduction of germs in one and the same operation.

MAJA-SCS is not only a guarantee for ideal sanitation conditions for the production of ice: The efficient routine cleaning process helps to maintain the value of your MAJA Nugget Ice Machine.



pict. 2

Installation accessories

■ Chute systems:

For individual adaption to the local situation

■ Installation on wall consoles (pict. 2) or subframes

e.g. for the use of ice storage and transport carts EV 50

■ Installation on ice storage silo type ES

If MAJA Nugget Ice has to be produced on stock, the quality of the ice and its durability depend significantly on the appropriate storage conditions. The nugget ice silos type ES are equipped with thermal insulation to minimize the melting process. The surface is easy to clean. Drain valves allow the evacuation of melting and cleaning water for sanitary ice storage conditions. The nugget ice can be taken out of the silo through a comfortable flap (pict. 3).



pict. 3

Type	Capacity kg	Suitable for	Width mm	Depth mm	Height mm	Weight kg
Subframe for EV 50	---	NA 175 - NA 530	787	688	669	24
Mobile ice storage bin EV 50	50	subframe	615	650	661	20
Silo ES 150	150	NA 175 - NA 530	762	801 - 1065	1016	66
Silo ES 300	300	NA 530 - NA 1420 C02	1220	801 - 1065	1270	94



NA 175
on subframe for
ice storage bin EV 50



NA 175
on silo ES 150



NA 300 / 500
on subframe for ice
storage bin EV 50



NA 300 / 530
on silo ES 150



NA 530
on silo ES 300



NA 970
on silo ES 300

MAJA Nugget Ice Machines:

The product range at a glance

MAJA NUGGET ICE MACHINES	Ice output kg/24h	Condensing unit		Refrigeration of condensing unit		Refrigerant			
		Compact machine with integrated condensing unit	Without condensing unit	By air	By water	R404A	R449A	R744	R290
NA 175 L R290	175	●		●					●
NA 300 L R290	300	●		●					●
NA 530 L	530	●		●		●			
NA 970 L	970	●		●		●			
NA 300 W	300	●			●	●			
NA 530 W	530	●			●	●			
NA 970 W	970	●			●	●			
NA 300	300		●			●	●		
NA 530	530		●			●	●		
NA 970	970		●			●	●		
NA 440 CO2	440		●					●	
NA 780 CO2	780		●					●	
NA 1420 CO2	1420		●					●	

Condensing units

- L = air-cooled condensing unit
- W = water-cooled condensing unit (on demand)

Refrigerants

- Eco-friendly standard refrigerant for MAJA Nugget Ice Machines type NA-L until 300 kg / 24 h:
Propane R290 (GWP 3)
- Standard refrigerant for all other machine types:
R404A (GWP 3922)
The NA range without condensing unit can also be operated with **R449A (GWP 1397)**.
Both belong to the fluorinated greenhouse gases!
- Alternatively, the eco-friendly **CO2-range** is available for operation with **R744 (GWP 1)**.

MAJA ICE MACHINES

Contents

Applications & characteristics of MAJA Flake Ice	2
The HY-GEN sanitation principle / MAJA-SCS	3
Flake ice machines SAH 85 / 170 L	4
Flake ice machines SAH 250 - 500 L	6
Flake ice machines SAH 800 - 3000 L	7
Flake ice machines split version RVH-L / RVH-LT	9
Flake ice machines (rotating evaporators) RVH	10
Flake ice machines for heat transfer medium circuit RVH-F	11
Flake ice machines for R717 RVH-NH3	12
Flake ice machines for R744 RVH-CO2	13
MAJA Flake Ice Machine range at a glance	14
Control units & sanitation accessories	16
Installation options	17
Handling and transport of flake ice	18
Flake ice storage systems	19
Storage silos with automatic extraction / ice batch weighing	20
Flake ice machines RVE-2S for fishing vessels	22
Application & characteristics of MAJA Nugget Ice	23
MAJA Nugget Ice Machine range	24
Sanitation options, installation options & silo systems for MAJA Nugget Ice	26
MAJA Nugget Ice Machine range at a glance	27

MAJA Ice Machines 5 / 2017 EN
Alterations reserved.